



## NOTA TÉCNICA

**Título:** Herramienta UNIFI Discovery.

Esta herramienta nos ayuda a localizar todos los dispositivos activos en la red de la familia UNIFI sin necesidad de ejecutar el programa UNIFI Controller. Esta herramienta se instala automáticamente cuando realizamos la instalación del UNIFI Controller, misma que podremos localizar en la carpeta de raíz del software UNIFI Controller, podría aparecer como sigue:

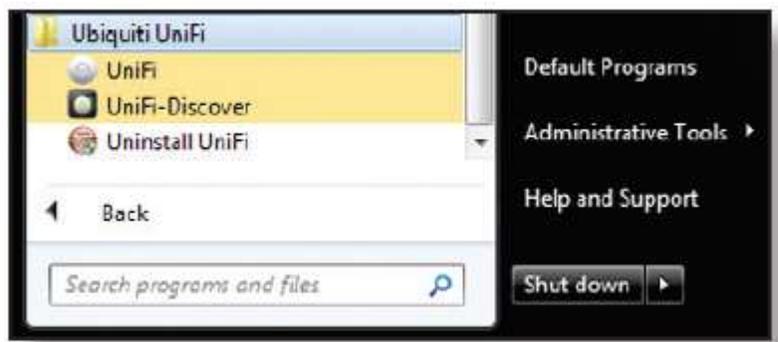

Para que se ejecute esta herramienta solo debemos darle click sobre el nombre de Unifi-Discovery y nos mostrara la pantalla principal siguiente:

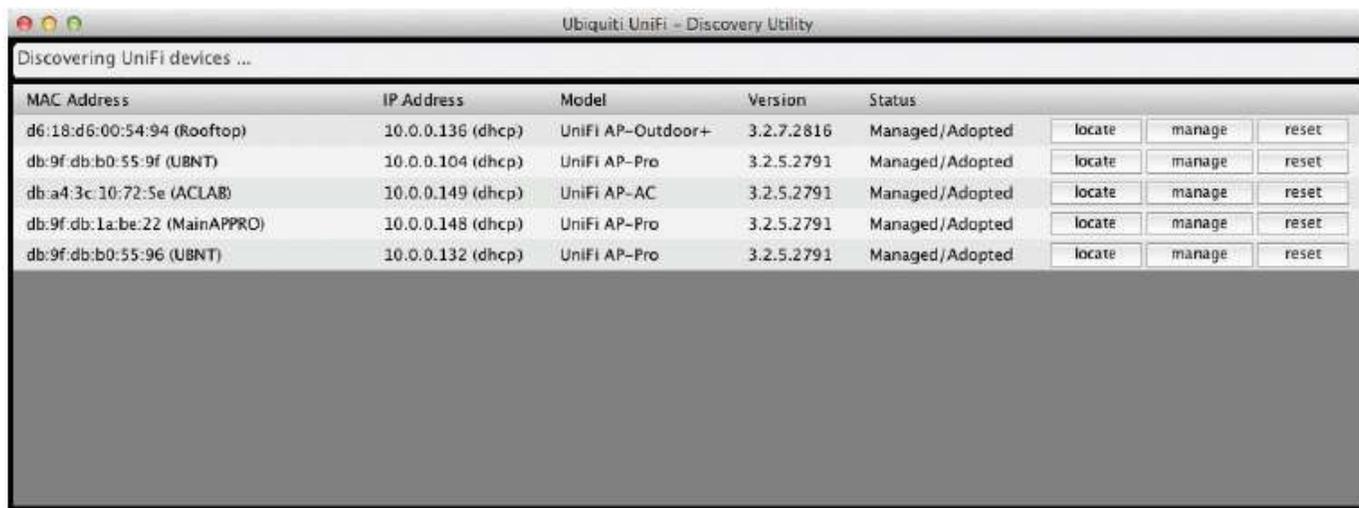


MAC Address	IP Address	Model	Version	Status			
d6:18:d6:00:54:94 (Rooftop)	10.0.0.136 (dhcp)	UniFi AP-Outdoor+	3.2.7.2816	Managed/Adopted	locate	manage	reset
db:9f:db:b0:55:9f (UBNT)	10.0.0.104 (dhcp)	UniFi AP-Pro	3.2.5.2791	Managed/Adopted	locate	manage	reset
db:a4:3c:10:72:5e (ACLAB)	10.0.0.149 (dhcp)	UniFi AP-AC	3.2.5.2791	Managed/Adopted	locate	manage	reset
db:9f:db:1a:be:22 (MainAPPRO)	10.0.0.148 (dhcp)	UniFi AP-Pro	3.2.5.2791	Managed/Adopted	locate	manage	reset
db:9f:db:b0:55:96 (UBNT)	10.0.0.132 (dhcp)	UniFi AP-Pro	3.2.5.2791	Managed/Adopted	locate	manage	reset

Al utilizar esta herramienta podremos conocer en una lista de dispositivos, su MAC Address, dirección IP, modelo, versión del firmware, su estatus de adopción y tres opciones mas.

Las funciones que podemos realizar en esta herramienta son las siguientes:

**Locate:** Nos permite localizar físicamente un dispositivo permitiendo que su led de estado prende y apague y así poder realizar su localización. Es necesario conocer el username y password con el que fue adoptado el dispositivo. Si aún no fue adoptado deberá teclear el username y password por default ubnt/ubnt.

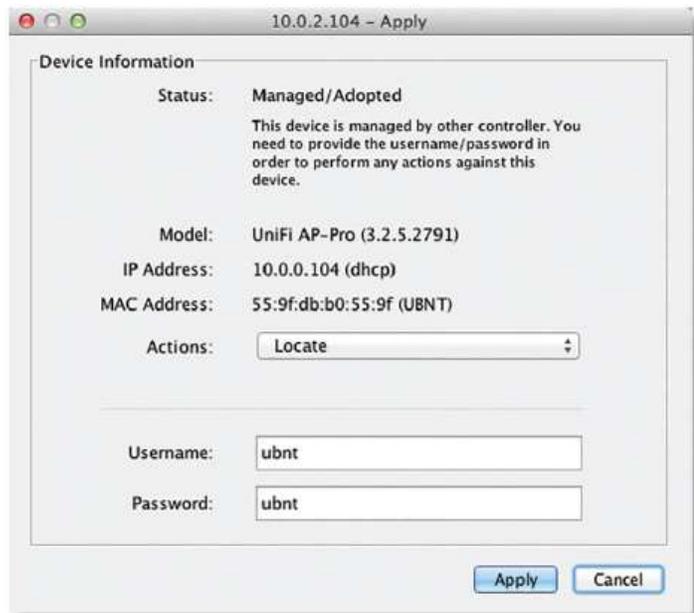

10.0.2.104 - Apply

Device Information


Status: **Managed/Adopted**  
This device is managed by other controller. You need to provide the username/password in order to perform any actions against this device.

Model: UniFi AP-Pro (3.2.5.2791)  
IP Address: 10.0.0.104 (dhcp)  
MAC Address: 55:9f:db:b0:55:9f (UBNT)

Actions:

Username:   
Password:

**Reset:** Regresa a valores de fábrica el dispositivo seleccionado. Es necesario conocer el username y password con el que fue adoptado el dispositivo.

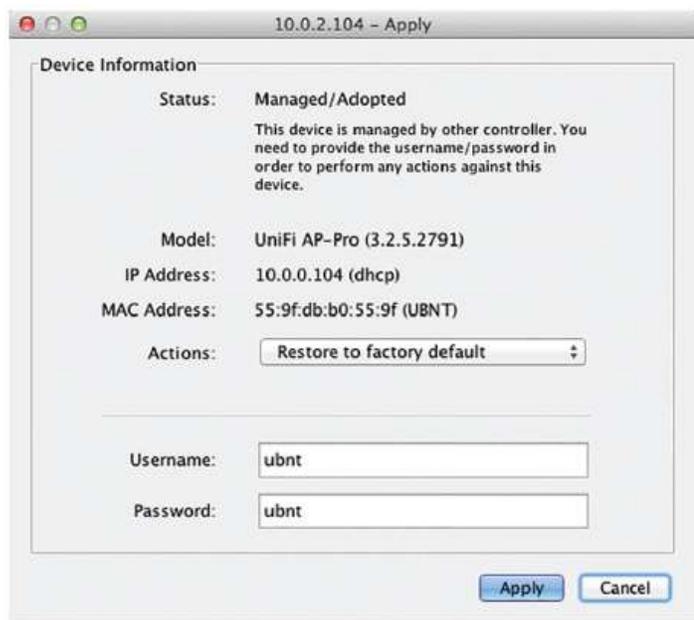

10.0.2.104 - Apply

Device Information

Status: **Managed/Adopted**  
This device is managed by other controller. You need to provide the username/password in order to perform any actions against this device.

Model: UniFi AP-Pro (3.2.5.2791)  
IP Address: 10.0.0.104 (dhcp)  
MAC Address: 55:9f:db:b0:55:9f (UBNT)

Actions:

Username:   
Password:

**Reboot:** Este botón realizar la acción de apagar y encender el dispositivo seleccionado, conservando la configuración guardada del dispositivo.



10.0.2.104 - Apply

Device Information

Status: Managed/Adopted  
This device is managed by other controller. You need to provide the username/password in order to perform any actions against this device.

Model: UniFi AP-Pro (3.2.5.2791)

IP Address: 10.0.0.104 (dhcp)

MAC Address: 55:9f:db:b0:55:9f (UBNT)

Actions:

---

Username:

Password: