


## NOTA TÉCNICA

### Título: Como ingresar a la interfaz web de Router VIGOR


Requisitos previos:

- Patch cord Cat5e, Cat6, Cat6a.
- Laptop o PC con entrada de red (Rj45).

1. Conecta tu Laptop o PC al cualquier puerto LAN del Router por medio del patch cord.

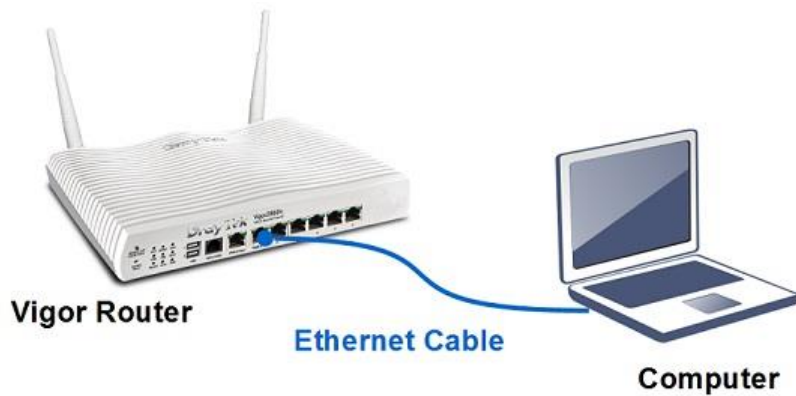

2. Para ingresar por medio de su interfaz web, es necesario verificar que la Laptop o PC a utilizar debe tener el mismo segmento de red que por default tienen los equipos de DRAYTEK (192.168.1.X).

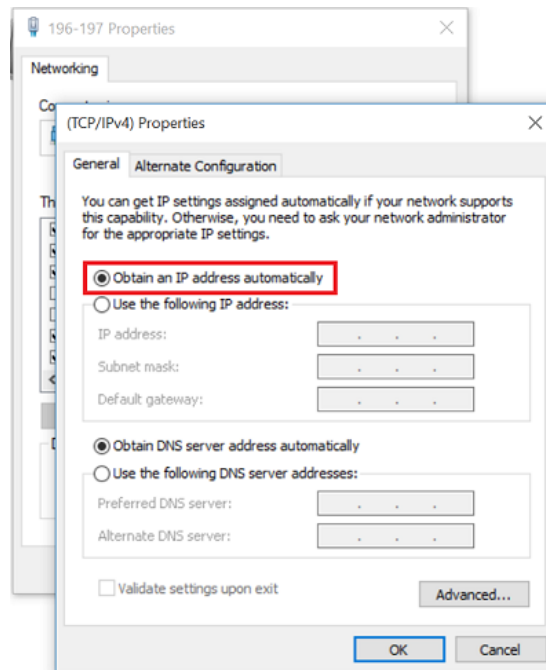

3. En cualquier explorador de internet (Chrome, Explorer, etc..) ingresa en la barra de direcciones la IP 192.168.1.1.



4. La IP, usuario y contraseña por default depende del modelo al que queremos ingresar como se muestra en la siguiente tabla.

	<b>Default LAN IP</b>	<b>Username</b>	<b>Default Password</b>
Vigor 130	192.168.1.1	admin	admin
Vigor 2110 Series			
Vigor 2120 Series			
Vigor 2130 Series			
Vigor 2132 Series			
Vigor 2710 Series			
Vigor 2710e/ne			
Vigor 2750 Series			
Vigor 2760 Series			
Vigor 2760_D Series			
Vigor 2820 Series			
Vigor 2830 Series			
Vigor 2830 V2			
Vigor 2832 Series			
Vigor 2850 Series			
Vigor 2860 Series			
Vigor 2912 Series			
Vigor 2920 Series			
Vigor 2925 Series			
Vigor 2952 Series			
Vigor 2960			
Vigor 300B			
Vigor 3200 Series			
Vigor 3220 Series			
Vigor 3900			

VigorFly 200 VigorFly 210 VigorPro 5510 Series BX2000			
Vigor 2910 Series Vigor 2950 Series Vigor 2955 Series VigorIPPBX 2820 Series VigorIPPBX 3510 Series	192.168.1.1	admin	(blank)
Vigor 120 Series Vigor 2700 Series Vigor 2700Ge/e Vigor 2100 Series Vigor 2900 Series Vigor 2930 Series Vigor 3100 Series VigorPro 5500 Series VigorPro 5300 Series	192.168.1.1	(blank)	(blank)
Vigor 3300V+ Vigor 3300V Series Vigor 3300 Series Vigor 3300B plus VigorTalk ATA24	192.168.1.1	draytek	1234
VigorAP 710 VigorAP 800 VigorAP 810 VigorAP 900 VigorAP 902 VigorAP 910c	192.168.1.2	admin	admin
VigorAP 700 VigorPhone 350	192.168.1.2	admin	(blank)

5. Una vez ingresada la IP correcta con usuario y contraseña correcta nos mostrara la siguiente pantalla de ingreso a la interfaz web.

